

# INDUSTRIAL SEWING MACHINES

General Catalog of Industrial Sewing Machines

2013.4 vol.2

- Lock Stitch Sewing Machine
- Zigzag Lock Stitch Sewing Machine
- Twin Needle Lock Stitch Sewing Machine
- Twin Needle Split Needle Bar Lock Stitch Sewing Machine
- Buttonhole Sewing Machine
- Button Attaching Machine
- Bar Tacking Machine
- Double Chain Stitch Sewing Machine
- Programmable Electronic Pattern Sewing Machine



Brother  
Earth

Working with you for a better environment

[www.brotherearth.com](http://www.brotherearth.com)

Catalogs of each model are available. Please find our office to inquire on outside back cover.  
Visit our official site <http://www.brother.com/> for further information.





Brother has contributed to our customers' business development with our sewing machines and services leading the industry, since its establishment as the "Yasui Sewing Machine Co." in 1908. We have continually produced innovative sewing machines, including the world's first direct-drive sewing machine (in 1993), the electronic eyelet buttonhole sewing machine (in 1994), and the electronic bar tacking machine (in 1995). We also established our original dry head technology (in 2003) to offer clean, neat sewing with high productivity. We are proud of our 100-year history, our creativity making the customers' dreams reality, and our global views. With all of these advantages, our customers appreciate the industrial sewing machines we offer and consider Brother as the best for their production needs.

## Providing solutions that customers truly appreciate



1

PRODUCTIVITY

The machines acceleration from the start, sewing speed, and ease of operation, enhance the overall productivity in all aspects of machine operation.

2

SEWING QUALITY

We provide high sewing quality with good stitch texture and a clean, neat finish.

3

COST PERFORMANCE

We contribute to the customers' profitability by providing energy saving products with high cost performance.

Energy efficient sewing machines

We offer our sewing machines with low power consumption and running cost, employing compact motors developed in-house to best fit the machine heads.

Sewing machines with clean sewing

Brother was the first to succeed in eliminating lubrication to the needle bar and thread take-up by applying special surface treatment to the sliding portions. Clean sewing without oil staining has been realized.

Sewing machines with less noise

Taking particular care to the vibration, noise quality, and quietness in machine operation, we produce a comfortable working environment for operators.

Sewing machines with attractive stitches

High sewing quality is achieved with good stitch texture produced by the optimally designed feed, needle bar, and thread take-up mechanisms, and with servo-controlled accurate stitching.

Sewing machines with operational ease

"The arm pocket is large enough, making material handling easy." "The machine is easy to see needle penetration." "The settings for sewing are easy." We have been receiving these favorable remarks from our customers. We have adopted designs based on the current human engineering to many parts of our sewing machines.

Reliable quality

In accordance with the ISO 9001 quality management system and under our strict control, we provide top-quality industrial sewing machines in the industry.

Dependable service & support system

We have a dependable support system close to our customers to assure satisfactory operation of the machines.

Proactive development of environment-conscious products

Brother is making an effort to eliminate the six substances restricted by the RoHS Directive. We also operate the "Brother Green Label" system with which we set standards for our environment-conscious products and certify the products in conformity with the standards.



## ● Lock Stitch Sewing Machine





Single Needle Direct Drive Straight Lock Stitcher with Thread Trimmer

### S-7200C

- Clean sewing with no oil staining.
- Smooth sewing with direct drive system.
- Energy-saving model.

Complete dry / semi-dry / minimum lubrication type  
For light materials and difficult-to-sew materials / medium materials / heavy materials

Max. sewing speed: 4,000-5,000 sti/min  
Max. stitch length: 4.2-5 mm  
Height of presser foot: 6-16 mm

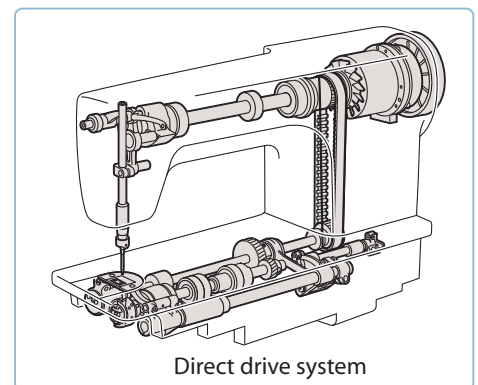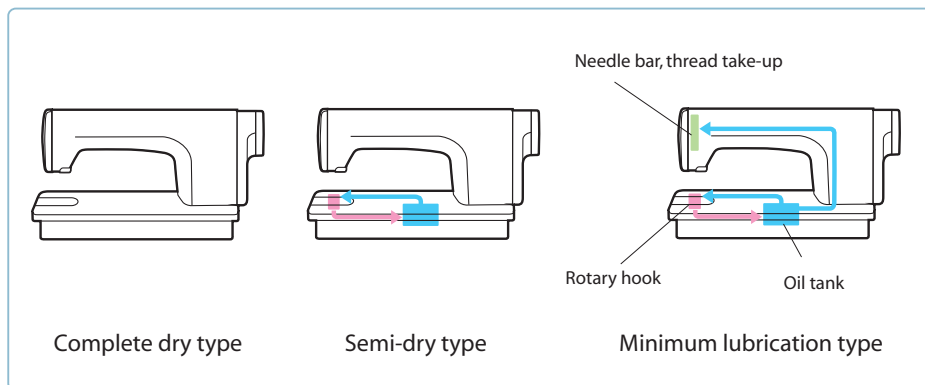

Single Needle Direct Drive Needle Feed Lock Stitcher with Thread Trimmer

### S-7220C



- The needle feed mechanism prevents uneven material feeding.
- Clean sewing with no oil staining.
- Smooth sewing with direct drive system.
- Energy-saving model.

Semi-dry / minimum lubrication type  
For medium materials / heavy materials  
Max. sewing speed: 4,000-5,000 sti/min  
Max. stitch length: 4.5-5.5 mm



High Speed Single Needle Straight Lock Stitcher

### S-1110A



- Stable sewing with low thread tension.
- Preventing staining with oil from the needle bar and thread take-up area.

For light materials / medium materials / heavy materials  
Max. sewing speed: 4,000-5,000 sti/min  
Max. stitch length: 4.2-5 mm  
Height of presser foot: 6-13 mm

Single Needle Straight Lock Stitcher with Side Cutter

### SL-777B



- The side cutter cuts the material end while sewing.
- Suitable for plain stitching and hem stitching of collars and flaps.

For medium materials  
Max. sewing speed: 4,500 sti/min  
Max. stitch length: 4 mm  
Height of presser foot: 6-13 mm  
Cutting width: 2.5 mm, 3.2 mm, 4.0 mm, 4.8 mm, 6.4 mm, 9.5 mm



## ● Lock Stitch Sewing Machine



S-7000DD


Single Needle Straight Lock Stitcher with Thread Trimmer

### S-7000DD

- Clean sewing without oil staining.
- Highly reliable electrical equipment.
- Easy to use with comfortable sewing.
- Environment conscious.

For light materials / medium materials / heavy materials

Max. sewing speed: 4,000-4,500 sti/min Max. stitch length: 4.2-5 mm

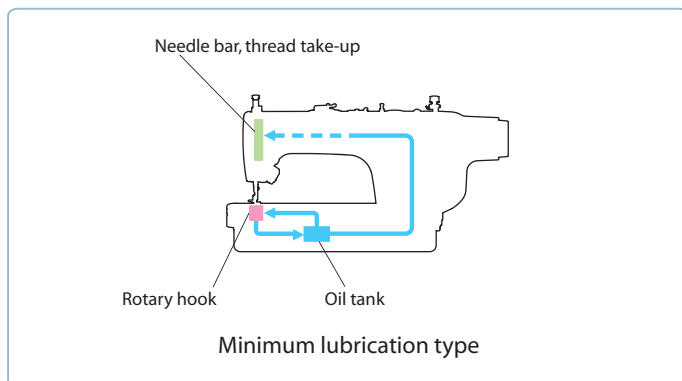

## ● Zigzag Lock Stitch Sewing Machine



Electronic Direct Drive Zigzag Lock Stitcher

### Z-8550A

DD

- Clean sewing with no oil staining.
- Energy-saving model.
- Wide-variety pattern sewing is available.

Max. sewing speed: 5,000 sti/min

Max. zigzag width: 10 mm



Electronic Direct Drive Zigzag Lock Stitcher with Thread Trimmer

### Z-8560A

DD



- The compact knife mechanism in a single unit enables simple maintenance.
- Clean sewing with no oil staining.
- Energy-saving model.
- Wide-variety pattern sewing is available.

Max. sewing speed: 5,000 sti/min

Max. zigzag width: 10 mm



# ● Twin Needle Lock Stitch Sewing Machine



Twin Needle Direct Drive Lock Stitcher

## T-8421C

- Direct drive / no thread trimmer type. The most suitable model for sewing of foundation garments.
- Clean sewing with no oil staining.

Semi-dry / minimum lubrication type  
For foundation / light and medium materials / heavy materials  
Max. sewing speed: 3,000-4,000 sti/min  
Max. stitch length: 4 mm

Height of presser foot: 7 mm  
Needle feed / bottom feed equipped as standard  
Quick back device equipped as standard

DD



Twin Needle Direct Drive Lock Stitcher with Thread Trimmer

## T-8422C

DD



- Stable thread trimmer operation enables high productivity.
- Clean sewing with no oil staining.

Semi-dry / minimum lubrication type  
For light and medium materials/heavy materials/heavy materials(for extra thick thread)Max. sewing speed: 3,000-4,000 sti/min  
Max. stitch length: 4-5 mm  
Height of presser foot: 7 mm  
Needle feed / bottom feed equipped as standard  
Quick back device & thread wiper equipped as standard



Twin Needle Direct Drive Lock Stitcher with Large Hook and Thread Trimmer



## T-8722C

DD



- Stable thread trimmer operation and large hook provide high productivity.
- Clean sewing with no oil staining

Minimum lubrication type  
For light and medium materials/heavy materials/heavy materials(for extra thick thread)Max. sewing speed: 3,000 sti/min  
Max. stitch length: 7 mm  
Height of presser foot: 7 mm  
Needle feed / bottom feed equipped as standard  
Quick back device & thread wiper equipped as standard

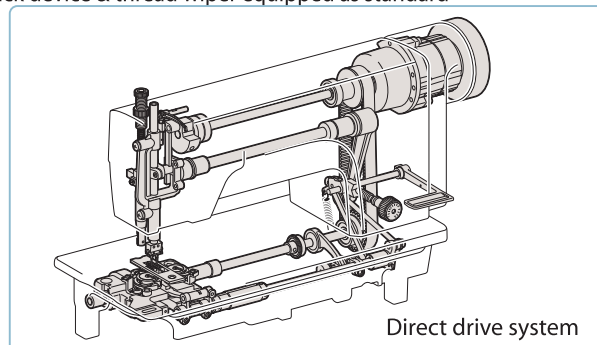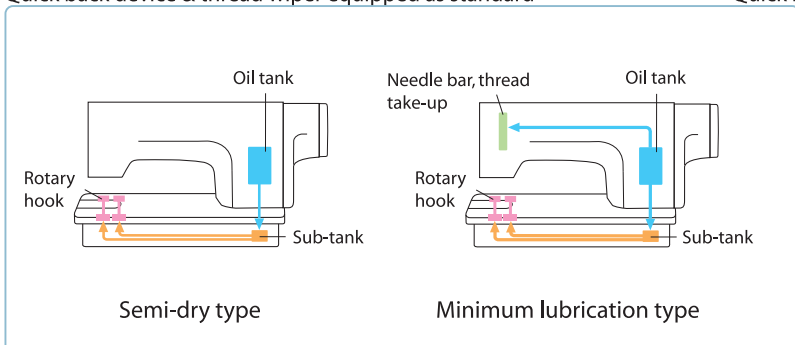

Twin Needle Lock Stitcher

## T-8420C

- High position of arm jaw and large arm pocket make handling material easier.
- Easy to replace gauge parts.

Semi-dry / minimum lubrication type  
For foundation / light and medium materials / heavy materials  
Max. sewing speed: 3,000-4,000 sti/min  
Max. stitch length: 4-5 mm  
Height of presser foot: 7 mm



Twin Needle Lock Stitcher with Large Hook

## T-8720C

- High position of arm jaw and large arm pocket make handling material easier.
- Easy to replace gauge parts.

Minimum lubrication type  
For heavy materialsMax. sewing speed: 3,000 sti/min  
Max. stitch length: 7 mm  
Height of presser foot: 7 mm  
Needle feed / bottom feed equipped as standard



# ● Twin Needle Split Needle Bar Lock Stitch Sewing Machine



Twin Needle Direct Drive Split Needle Bar Lock Stitcher with Thread Trimmer

## T-8452C



- Stable thread trimmer operation enables high productivity.
- Clean sewing with no oil staining.



Minimum lubrication type

For light and medium materials/heavy materials/  
heavy materials(for extra thick thread)Max. sewing speed: 3,000 sti/min  
Max. stitch length: 5 mm

Height of presser foot: 7 mm

Needle feed / bottom feed equipped as standard

Quick back device & thread wiper equipped as standard

Twin Needle Direct Drive Split Needle Bar Lock Stitcher with Large Hook and Thread Trimmer

## T-8752C



- Stable thread trimmer operation and large hook provide high productivity.
- Clean sewing with no oil staining.



Minimum lubrication type

For light and medium materials/heavy materials/  
heavy materials(for extra thick thread)Max. sewing speed: 3,000 sti/min  
Max. stitch length: 7 mm

Height of presser foot: 7 mm

Needle feed / bottom feed equipped as standard

Quick back device & thread wiper equipped as standard

Twin Needle Split Needle Bar Lock Stitcher

## T-8450C



- High position of arm jaw and large arm pocket make handling material easier.
- Easy to replace gauge parts.

Minimum lubrication type

For light and medium materials / heavy materials

Max. sewing speed: 3,000 sti/min

Max. stitch length: 5 mm

Height of presser foot: 7 mm

Needle feed / bottom feed equipped as standard

Twin Needle Split Needle Bar Lock Stitcher with Large Hook

## T-8750C



- High position of arm jaw and large arm pocket make handling material easier.
- Easy to replace gauge parts.



Minimum lubrication type

For heavy materialsMax. sewing speed: 3,000 sti/min

Max. stitch length: 7 mm

Height of presser foot: 7 mm

Needle feed / bottom feed equipped as standard

## ● Buttonhole Sewing Machine



Electronic Lockstitch Button Holer

### HE-800B



- Less sewing troubles with the newly designed hook.
- Beautiful sewing finishes even fine patterns.
- Easy and operator-intuitive operation panel.
- High energy saving.

For woven articles / knitted articles

Cutter length: 4-32 mm

Max. sewing width: 6 mm

Max. button hole length: 40 mm

Height of presser foot: 13 mm

Max. sewing speed: 4,000 sti/min

Thread trimmer equipped as standard



Electronic Eyelet Button Holer

### RH-9820



- Fine finishing of button holes.
- Max. sewing speed 2,500 sti/min improves productivity.
- Large arm pocket allowing smooth material handling.
- Easy-to-use operation panel.

Stitch pitch: 0.5-2.0 mm

Zigzag width: 1.5-5.0 mm

Height of work clamp: 12-16 mm

Sewing length: 5-50 mm

Taper bartack length: 0-20 mm

Max. sewing speed: 2,500 sti/min

Upper thread trimmer equipped as standard



## ● Button Attaching Machine



Electronic Direct Drive Lockstitch Button Sewer

### BE-438F



- Attractive sewing accurate to the sewing data.
- Low power consumption.
- Low noise and low vibration.
- Clean Sewing.

Max. sewing area (X-Y): 6.4 X 6.4 mm

Stitch length: 0.05-6.4mm

Button clamp height: 13 mm

Number of stored data: 64 sewing patterns as standard

Button size: 8-30 mm outer diameter

Max. sewing speed: 2,700 sti/min

Digital tension, thread trimmer and thread wiper equipped as standard





## ● Bar Tacking Machine



KE-430F

### Electronic Direct Drive Lockstitch Bar Tacker

## KE-430F

DD



- High productivity with maximum sewing speed, 3,200 sti/min.
- Attractive sewing accurate to the sewing data.

For ordinary materials / denim / knitted materials / foundation

Max. sewing area (X-Y): 40 X 30 mm

Stitch length: 0.05-12.7 mm

Number of stored data: 89 sewing patterns as standard

Max. number of stitches: 5,000stitches/pattern Max. sewing speed: 3,200 sti/min


Digital tension, thread trimmer and thread wiper equipped as standard

### Sewing Data Programming Software


## PS-300B

- Your original sewing patterns can be created enhancing the product's value.
- Sewing pattern data can easily be modified. It reduces the time for resizing and correcting.
- Sewing pattern data for existing models and external data can also be used.

Main function: Creating, editing, setting and converting of sewing data.  
File input/output, data input/output

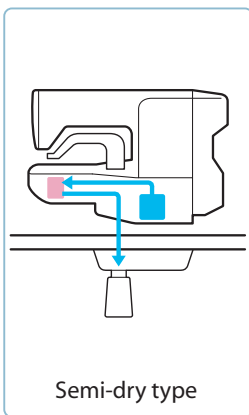

Semi-dry type

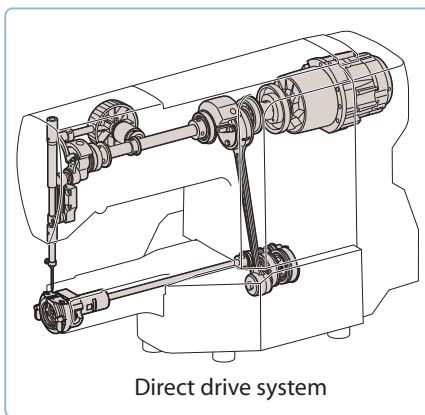

Direct drive system

## ● Double Chain Stitch Sewing Machine



DA-9270

### Twin Needle / Three Needle Feed Off the Arm Double Chain Stitcher

## DA-9270



For light and medium materials  
Max. sewing speed: 4,000 sti/min  
Height of presser foot: 10 mm  
Stitch length: 3-3.5 mm  
Circumference of cylinder bed: 171 mm

### Twin Needle / Three Needle Feed Off the Arm Double Chain Stitcher

## DA-9280



For heavy materials / extra heavy materials  
Max. sewing speed: 4,000 sti/min  
Height of presser foot: 11 mm  
Stitch length: 4.2 mm  
Circumference of cylinder bed: 171 mm



# ● Programmable Electronic Pattern Sewing Machine



Direct Drive Programmable Electronic Pattern Sewer with Cylinder Bed 130 x 60 mm

## BAS-300G

DD

- Attractive sewing accurate to the sewing data.
- High productivity with maximum sewing speed, 2,700 sti/min.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 130 X 60 mm  
For heavy materials / medium materials / seat belt  
Max. sewing speed: 2,700 sti/min  
Stitch length: 0.05-12.7 mm  
Number of stitches: Max. 20,000 stitches per pattern

PD-3000



Direct Drive Programmable Electronic Pattern Sewer with Cylinder Bed <Treble Hook><Treble Hook with Intermittent Presser Foot> 130 x 60mm


## BAS-300G-484/484SF

DD

- Treble Hook equipped, reducing the frequency of bobbin changes.data.
- Accurate and stout sewing.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 130 X 60 mm  
For extra heavy materials / heavy materials / seat belt  
Max. sewing speed: 2,200 sti/min  
Stitch length: 0.05-12.7 mm  
Number of stitches: Max. 20,000 stitches per pattern

PD-3000



Direct Drive Programmable Electronic Pattern Sewer with Cylinder Bed 130 x 100 mm

## BAS-311G

DD

- Attractive sewing accurate to the sewing data.
- High productivity with maximum sewing speed, 2,700 sti/min.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 130 X 100 mm  
For heavy materials / medium materials / seat belt  
Max. sewing speed: 2,700 sti/min  
Stitch length: 0.05-12.7 mm  
Number of stitches: Max. 20,000 stitches per pattern

PD-3000



Direct Drive Programmable Electronic Pattern Sewer with Cylinder Bed 220 x 100 mm

## BAS-326G

DD

- Attractive sewing accurate to the sewing data.
- High productivity with maximum sewing speed, 2,700 sti/min.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 220 X 100 mm  
For heavy materials / medium materials / seat belt  
Max. sewing speed: 2,700 sti/min  
Stitch length: 0.05-12.7 mm  
Number of stitches: Max. 20,000 stitches

PD-3000



Direct Drive Programmable Electronic Pattern Sewer with Perfect Stitch Hook and Cylinder Bed 220 x 100 mm

## BAS-326G-PS

DD

- Amazing high quality stitches.
- Wide-range perfect stitch area.
- High productivity with maximum sewing speed, 2,700 sti/min.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 220 X 100 mm  
For heavy materials  
Max. sewing speed: 2,700 sti/min  
Stitch length: 0.05-12.7 mm  
Number of stitches: Max. 20,000 stitches

PD-3000



## ● Programmable Electronic Pattern Sewing Machine



BAS-342G

Direct Drive Programmable Electronic Pattern Sewer with Cylinder Bed 300 x 200 mm

### BAS-342G

DD

- Attractive sewing accurate to the sewing data.
- High productivity with maximum sewing speed, 2,700 sti/min.
- Strong needle penetration force is available and comfortable sewing is possible with heavy materials.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 300 X 200 mm

For heavy materials


Max. sewing speed: 2,700 sti/min

(with stitch length 3.5 mm or below.)

Stitch length: 0.05-12.7 mm

Number of stitches: Max. 20,000 stitches per pattern

PD-3000

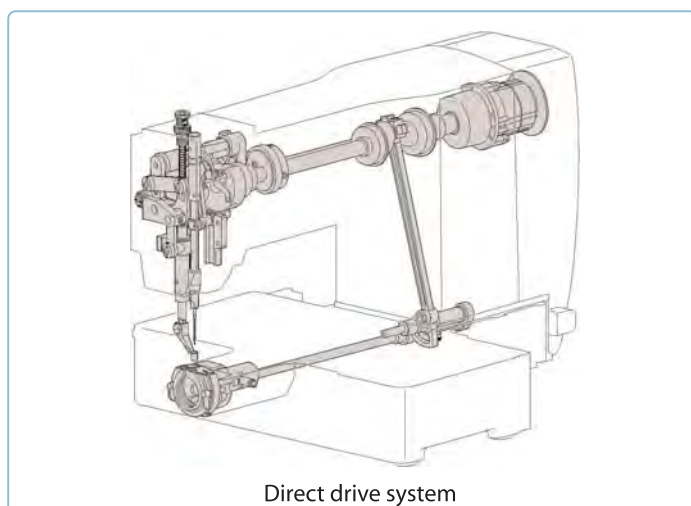

Direct drive system

Direct Drive Programmable Electronic Pattern Sewer with Perfect Stitch Hook and Cylinder Bed 300 x 200 mm

### BAS-342G-PS

DD

- Amazing high quality stitches.
- Wide-range perfect stitch area.
- By using PD-3000 Programmer, creation and management of sewing data is easily done.

Sewing area (X-Y): 300 X 200 mm

For heavy materials

Max. sewing speed: 2,700 sti/min

Stitch length: 0.05-12.7 mm

Number of stitches: Max. 20,000 stitches per pattern

PD-3000



Sewing Data Programming Software

### PS-300B

- Your original sewing patterns can be created enhancing the product's value.
- Sewing pattern data can easily be modified. It reduces the time for resizing and correcting.
- Sewing pattern data for existing models and external data can also be used.

Main function: Creating, editing, setting and converting of sewing data. File input/output, data



Sewing Data Programmer

### PD-3000

- Sewing data can easily be created with icons and commands.
- The details of the sewing data in process of creation can be viewed, with the indication of the comments, the shape, horizontal and vertical size, and number of stitches of the pattern.
- The programmer is suitable for sewing data management.
- The setting values of the memory switches can be checked with the programmer.
- English, Chinese, Spanish, Italian, French, German, Portuguese, Turkish, Vietnamese and Japanese are supported as display language.

PD-3000





Product specifications are subject to change for improvement without notice. The values of the data depend on the specifications of models. Please refer to the catalogs of each model or our official site for further information.

Please read instruction manual before using the machine for safety operation.



**BROTHER INDUSTRIES, LTD.**

1-5, Kitajizoyama, Noda-cho, Kariya-shi, Aichi 448-0803, Japan. Phone: 81-566-95-0088 Fax: 81-566-25-3721 <http://www.brother.com/>

CHINA	BROTHER MACHINERY SHANGHAI LTD. <a href="http://www.brother-cn.net/">http://www.brother-cn.net/</a>	+86-21-3135-3355
HONG KONG	BROTHER INTERNATIONAL (HK) LTD. <a href="http://www.brother.com.hk/">http://www.brother.com.hk/</a>	+852-3589-9040
ASIA	BROTHER INTERNATIONAL SINGAPORE PTE LTD. <a href="http://www.brother.com.sg/">http://www.brother.com.sg/</a>	+65-6536-8891
EUROPE AFRICA, MIDDLE EAST	BROTHER INTERNATIONALE INDUSTRIEMASCHINEN G.m.b.H. <a href="http://www.brother-ism.com/">http://www.brother-ism.com/</a>	+49-2822-6090
AMERICAS	BROTHER INTERNATIONAL CORPORATION <a href="http://www.brother-usa.com/">http://www.brother-usa.com/</a>	+1-908-704-1700